



CL & CLT SERIES

Narrow-line Cr:ZnSe/S CW Lasers

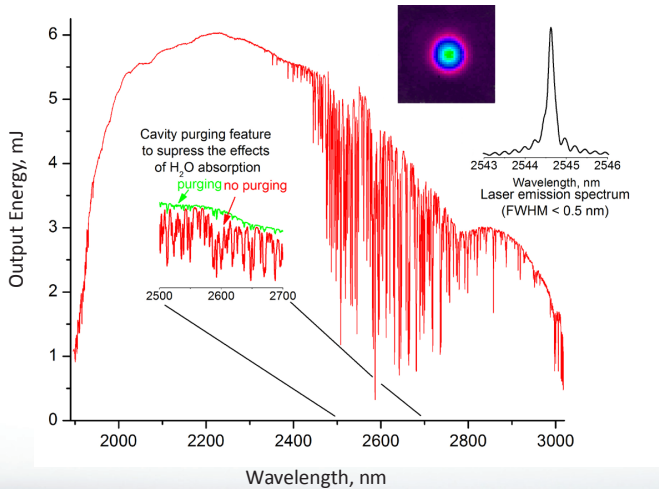

Typical Tuning Curve of CLT-5 Laser

**Fixed Frequency or
Tunable Optical Head**

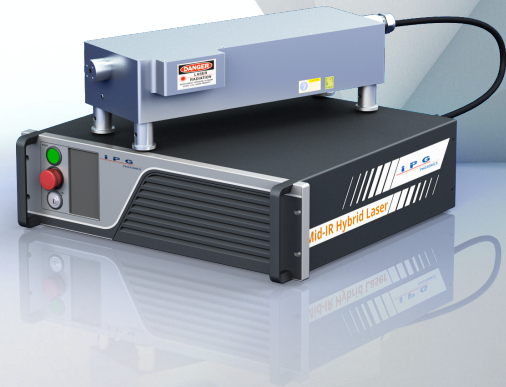

FEATURES

- ▶ Continuous Wave Operation
- ▶ Narrow Linewidth, <0.5 nm Typ.
- ▶ Record Output Power 150 W
- ▶ TEM₀₀ Output Beam Quality



APPLICATIONS

- ▶ Spectroscopy
- ▶ Free Space Communications
- ▶ OPO Pump Source
- ▶ Medical Applications
- ▶ Skin Rejuvenation
- ▶ Laser Scalpel
- ▶ Dental Applications
- ▶ Environmental Monitoring
- ▶ Industrial Process Control
- ▶ Materials Processing
- ▶ Plastic Cutting, Welding, Marking and Drilling

IPG Photonics offers **CL and CLT Series Cr:ZnSe/S** continuous wave Mid-IR fiber-bulk hybrid lasers. These lasers provide from 1 to 150 W average output power at a customer selected fixed wavelength (CL Series) or 0.2 to 100 W tunable output (CLT Series) in the range of 1.9 to 3.0 μm . CL and CLT lasers feature typical narrow linewidth of less than 0.5 nm. Standard and rapid tuning options are available. Rapidly tunable (swept) models allow scanning the entire tuning range with acquisition rate of up to 1000 spectra per second. These laser models are designed for characterizing broad spectral features such as absorption spectra of polymers.

These hybrid solid state lasers are pumped by IPG's efficient and reliable erbium or thulium CW fiber lasers. CL and CLT Series lasers are used in a range of applications including spectroscopy, Mid-IR OPO pumping, environmental monitoring, test and measurement, free space communications, industrial process control, medical applications and plastics materials processing.

CL & CLT SERIES

Narrow-line Cr:ZnSe/S CW Lasers


Optical Characteristics	CL	CL-SR	CLT	CLT-SR
Mode of Operation	CW			
Central Wavelength	Customer Selected in 1.9-3.0 μm Range		Tunable in 1.9-3.0 μm Range	
Spectral Linewidth, nm	0.1-2.0, Typ. < 0.5			
Output Power*, W	1-10	20-150	0.1-10	10-100
Power Tunability, %	10-100			
Wavelength Tuning Options**	N/A		Standard or Rapid (Swept) Tuning Mode	
Beam Diameter (FW, $1/e^2$), mm	1.5 \pm 0.5			
Beam Divergence, mrad	<5	0.1-1, Typ. 0.5		
Polarization	Random or Linear		Linear, Horizontal >100:1	
Beam Quality, M^2	<1.2, typ. \leq 1.1			
Warm-up Time, min	5 from Standby, 15 from Cold			

General Characteristics	
Optical Head Style	CW Fixed or Tunable Module
Pump Laser***	IPG Photonics' ELR or TLR CW Fiber Laser
Pump Laser Dimensions (W \times D \times H), mm	448 \times 403 \times 132
Optical Head Dimensions (W \times D \times H), mm	165 \times 505 \times 122
Supply Voltage 50-60 Hz, VAC	110-240
Power Consumption, W	200 Typ.

* Custom output powers are available upon request. Output power may be limited by wavelength selection.

** All tunable lasers are motor-driven and computer controlled. An external wavelength meter must be used to monitor the output wavelength. Rapidly tunable (swept) models allow scanning the entire tuning range with acquisition rate of up to 1000 spectra per second. These laser models are designed for characterizing broad spectral features such as absorption spectra of polymers.

*** Pump laser model depends on the combination of parameters

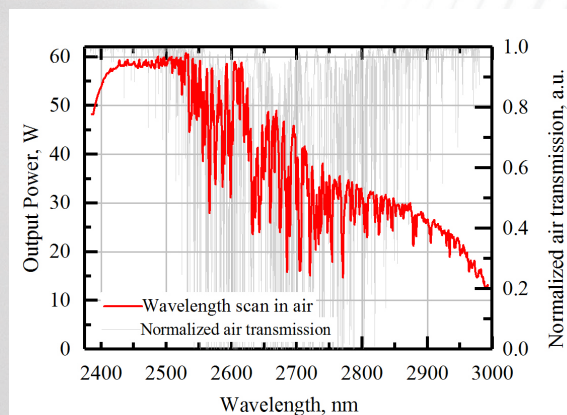

Typical Tuning Curve of CLT-60-SR



IPGPhotonics.com/contact
www.ipgphotonics.com

MAX. AVERAGE OUTPUT POWER: 300 W
 WAVELENGTH RANGE: 1800-3100 nm

DANGER - INVISIBLE LASER
 RADIATION AVOID EYE OR SKIN
 EXPOSURE TO DIRECT OR
 SCATTERED RADIATION
 CLASS 4 LASER PRODUCT
 IEC 60825-1:2014

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2024 IPG Photonics Corporation. All rights reserved.