


CLPF-2500-FC-SERIES

Femtosecond Middle-IR Optical Frequency Combs



Spectral Coverage Achieved with CLPF-2500-FC series

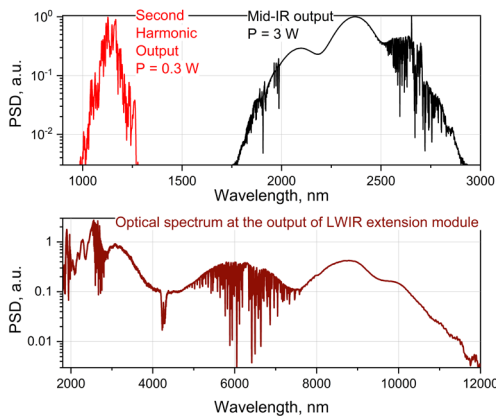

NEW



FEATURES

- ▶ Two Cycle Pulses with up to 4 W Power in 2-3 μm Band
- ▶ Sub Two Cycle Transients with up to 0.15 W Power in 6-12 μm Band
- ▶ Few Cycle Pulses with up to 0.5 W Power in 3-7 μm Band
- ▶ Complete Set of Electronics for Comb Stabilization
- ▶ Seamless Dual Comb Integration



APPLICATIONS

- ▶ Dual Comb Spectroscopy
- ▶ FTIR Spectroscopy
- ▶ Nano-imaging, Nano-spectroscopy
- ▶ Metrology
- ▶ Time-resolved Spectroscopy
- ▶ Studies of Ultrafast Dynamics
- ▶ Nonlinear Optics

IPG Photonics introduces an important addition to the family of middle-IR femtosecond lasers. **NEW CLPF-2500-FC** optical frequency combs provide access to the entire visible through infrared spectral range (500 nm to 18 μm) with record-breaking Watt-level average power. CLPF-2500-FC optical frequency combs are pumped by IPG efficient and reliable CW fiber lasers.

CLPF-2500-FC optical frequency combs feature pulse repetition frequency and carrier envelope offset frequency stabilization. Optical lock to a stabilized 1064 nm laser and automated pulse repetition frequency tuning are offered as options for dual comb spectroscopy applications.

CLPF-2500-FC SERIES

Femtosecond Middle-IR Optical Frequency Combs

Optical Characteristics	2f band*	f band *	0f band *
Central Wavelength, nm	1150	2400	9000
Spectral Bandwidth FWHM, nm	70	250	1500
Spectral Bandwidth (-20 dB level), THz	60	60	25
Average Power, W	0.3	3	0.3
Pulse Energy, nJ	4	40	4
Typ. Pulse Duration, fs	500	<24	<1000
Repetition Rate*, MHz		80	
Polarization		Linear	
Long Term Power Stability***, %		1	
Output Beam Mode, M ²	<2	<1.5	<2
Beam Diameter (FW, 1/e ²), mm	2±1	2.0±0.5	4±1
Beam Divergence, mrad	<5	<2.5	<5
Warm up Time, min		15 – 60	


* The system is equipped with three optical outputs at mid-IR fundamental wavelength (f), near-IR second harmonic wavelength (f), and long-wave IR wavelengths (0f)

** Custom repetition rates are available upon request.

*** After 1 hour warm up, over 2 hours, ambient T ±2°C

General Characteristics

Integrated Pump Laser	IPG Photonics Erbium CW Fiber Laser
Pump Laser Dimensions (W × D × H), mm	448 × 403 × 132
Optical Head Dimensions (W × D × H), mm	225 × 430 × 136
Power Consumption, W	200 Typ.

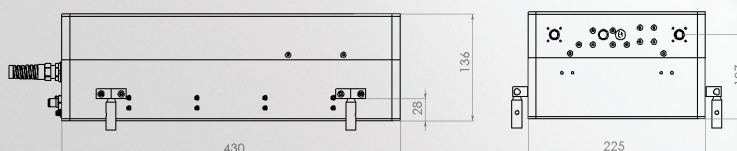

+1 (508) 373-1100;

IPGPhotonics.com/contact

www.ipgphotonics.com

MAX. AVERAGE OUTPUT POWER: 4 W
 MAX. PEAK OUTPUT POWER: 2 GW
 PULSE DURATION: 20-100 fs
 PULSE REPETITION RATE: 80 MHz
 WAVELENGTH RANGE: 500-18000 nm

DANGER - INVISIBLE LASER
 RADIATION AVOID EYE OR SKIN
 EXPOSURE TO DIRECT OR
 SCATTERED RADIATION
 CLASS 4 LASER PRODUCT

IEC 60825-1:2014

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2022 IPG Photonics Corporation. All rights reserved.