

Air Blow Unit AB2



Feature

- Remove chips powerfully by placing nozzle just above the holder
- Nozzle has internal spring so that holder replacement could be done without nozzle removal
- Blow air toward the chip discharge outlet of holder with special nozzle


Structure 1

- Become possible to blow powerful air by placing nozzle just above the holder.
Major improvement of chip removal compared to existing products.



Structure 2


- Holder replacement is possible by sliding the nozzle. Unit displacement is unnecessary.

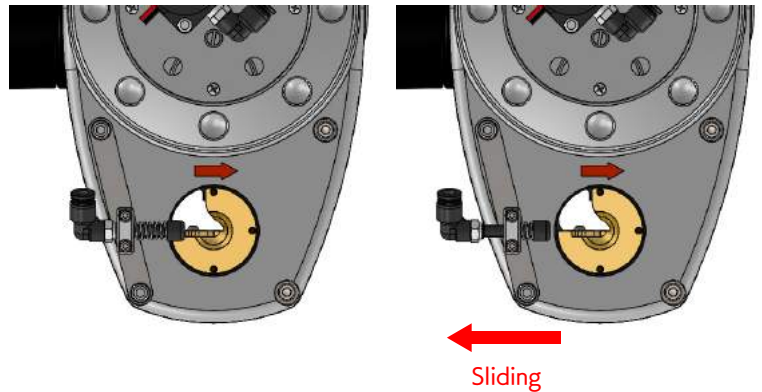


Structure 3

- The special nozzle could blow air toward the chip discharge outlet of holder.
Reduced scattering of tiny chips compared to existing products.

Enlarged view

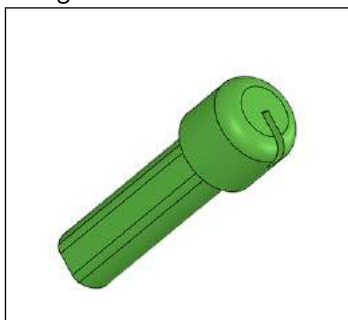

※Blow area (image)

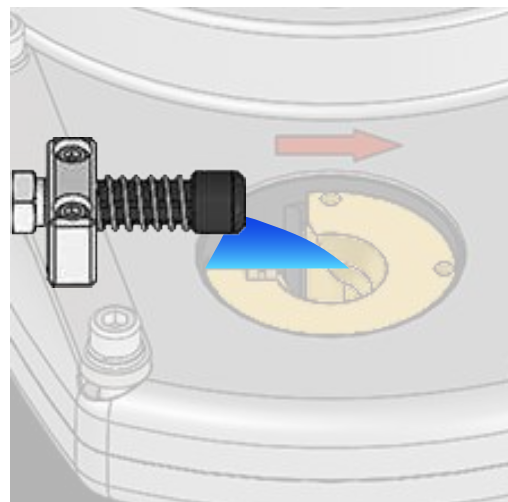

※ Specification and design are to be changed without notice for improvement.